

SUBMITTAL

Part Number
2009094ASD (RapidFit)

SUBMITTED TO _____
COMPANY _____
JOB NAME _____
EQUIPMENT _____
SIGNATURE _____
DATE _____



RAPID-FIT ADAPTER SUBMITTAL 2009094ASD/KD


FEATURES:

1. CURB ADAPTER CONSTRUCTED OF HEAVY GAUGE GALVANIZED STEEL
2. MULTIPLE PIECE SCREW TOGETHER CONSTRUCTION (FULLY ASSEMBLED OR KNOCK DOWN AVAILABLE)
3. GASKETING IS PROVIDED FOR UNIT TO CURB ADAPTER SEALING
4. SUPPLY AND RETURN TRANSITIONS INCLUDED.
5. CURB ADAPTER IS FULLY INSULATED.
6. FOR KNOCK DOWN VERSION, TEK SCREWS, CAULKING & SPRAY BOTTLE INCLUDED (WATER ACTIVATED GLUE INSULATION)

Approved By: _____
Date: _____

MATERIAL: 16 GA GALVANIZED STEEL
WEIGHT: 253 LBS

OLD UNIT: CARRIER 10A
NEW UNIT: CARRIER 47A

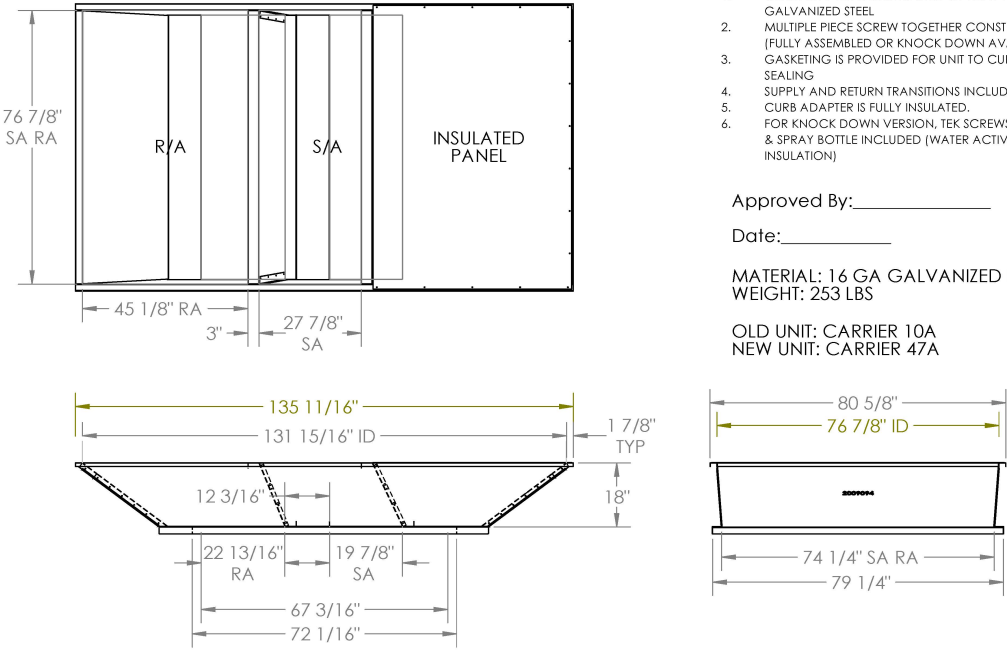

Top View Dimensions:

- Overall Width: 135 11/16"
- Inner Width: 131 15/16"
- Left Flange Width: 45 1/8" RA
- Right Flange Width: 27 7/8" SA
- Flange Thickness: 3"
- Height: 76 7/8" SA RA

Side View Dimensions:

- Top Width: 80 5/8"
- Inner Top Width: 76 7/8" ID
- Bottom Width: 74 1/4" SA RA
- Bottom Width: 79 1/4"
- Height: 18"
- Top Flange Thickness: 1 7/8" TYP
- Internal Slope: 12 3/16"
- Bottom Flange Width: 22 13/16" RA
- Bottom Flange Width: 19 7/8" SA
- Bottom Flange Width: 67 3/16"
- Bottom Flange Width: 72 1/16"

FEATURES

ONE PIECE WELDED CONSTRUCTION

FACTORY INSTALLED SUPPLY TRANSITIONS

FULLY INSULATED

DESIGNED FOR EVEN WEIGHT DISTRIBUTION

FABRICATED OF HEAVY GAUGE G90 GALVANIZED STEEL

ALL WELDS SPRAYED WITH GALVANIZING COMPOUND

GASKET PROVIDED FOR UNIT TO ADAPTER SEALING

CAMBRIDGEPORT STRONGLY RECOMMENDS CONFIRMING THE DIMENSIONS ON THIS SUBMITTAL

CURB ADAPTERS ARE BASED ON UNIT MANUFACTURERS STANDARD CURB DIMENSIONS.
CAMBRIDGEPORT CANNOT BE RESPONSIBLE FOR ANY DEVIATIONS FROM FACTORY DIMENSIONS OR INCORRECT MODEL NUMBERS.